



Termokurczliwe kaptury uszczelniające typu ECD



kaptur termokurczliwy

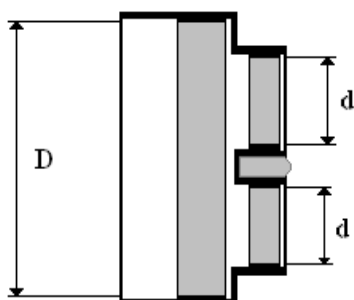

rura preizolowana

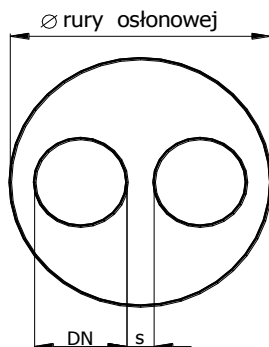

Symbol katalogowy	D [mm]		d [mm]		Zastosowanie do rur preizolowanych	
	max	min	max	min	izolacja standardowa	s [mm]
ECD 125-20	133	95	32	22	Ø125 / 2 × DN 20	18
ECD 140-25	150	110	38	27	Ø140 / 2 × DN 25	18
ECD 160-32	170	120	48	34	Ø160 / 2 × DN 32	18
ECD 160-40	170	120	54	39	Ø160 / 2 × DN 40	18
ECD 200-50	209	140	70	47	Ø200 / 2 × DN 50	20
ECD 225-65	234	180	82	58	Ø225 / 2 × DN 65	20
ECD 250-80	260	195	96	78	Ø250 / 2 × DN 80	25
ECD 315-100	328	240	124	98	Ø315 / 2 × DN 100	25
ECD 400-125	415	310	149	125	Ø400 / 2 × DN 125	30
ECD 450-150	465	390	182	148	Ø450 / 2 × DN 150	40
ECD 560-200	575	480	238	179	Ø560 / 2 × DN 200	45