



Termokurczliwe kaptury uszczelniające typu ECDp (wersja plus)



kaptur termokurczliwy

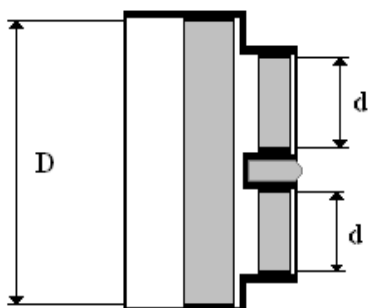

rura preizolowana



Symbol katalogowy	D [mm]		d [mm]		Zastosowanie do rur preizolowanych	
	max	min	max	min	Izolacja plus	S [mm]
ECDp 140-20	150	110	32	22	Ø140 / 2 × DN 20	18
ECDp 160-25	170	120	38	27	Ø160 / 2 × DN 25	18
ECDp 180-32	190	130	48	34	Ø180 / 2 × DN 32	18
ECDp 180-40	190	130	54	39	Ø180 / 2 × DN 40	18
ECDp 225-50	235	180	70	47	Ø225 / 2 × DN 50	20
ECDp 250-65	260	195	82	58	Ø250 / 2 × DN 65	20
ECDp 280-80	290	215	96	78	Ø280 / 2 × DN 80	25
ECDp 355-100	370	260	124	98	Ø355 / 2 × DN 100	25
ECDp 450-125	465	390	149	125	Ø450 / 2 × DN 125	30
ECDp 500-150	520	465	182	148	Ø500 / 2 × DN 150	40
ECDp 630-200	655	530	238	179	Ø630 / 2 × DN 200	45