


Termokurczliwe kaptury uszczelniające typu ECR



Symbol katalogowy	D [mm]		d1 [mm]		d2 [mm]		Zastosowanie do rur preizolowanych	
	max	min	max	min	max	min	typ rury	s [mm]
ECR 32+20	133	95	48	34	32	22	Ø125 / DN 32+DN 20	18
ECR 40+20	150	110	54	39	32	23	Ø140 / DN 40+DN 20	18
ECR 50+25	170	120	70	47	38	27	Ø160 / DN 50+DN 25	20
ECR 65+32	210	140	82	58	48	34	Ø200 / DN 65+DN 32	20
ECR 80+40	235	180	95	78	54	39	Ø225 / DN 80+DN 40	25
ECR 100+50	260	195	120	89	70	47	Ø250 / DN 100+DN 50	25

kaptur termokurczliwy

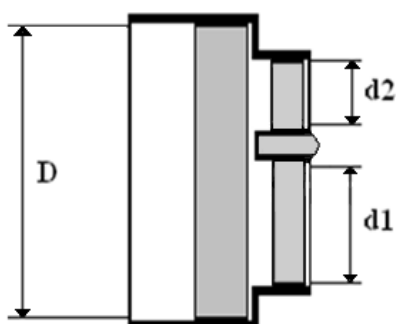

rura preizolowana

